

EMBOSSSED CLADDING SYSTEMS

Installation guide


Robust, attractive, versatile cladding to enhance and refresh any home

Double Shiplap Cladding Installation guide

! Important

Storage

- Embossed cladding (P 1024) & 167 (P 1036) must be stored in a dry well ventilated area away from direct exposure to sunlight.
- Transport and store the profiles horizontally.

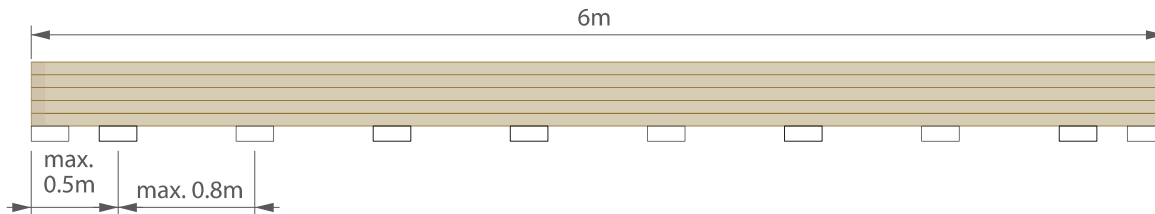

Precautions

- Embossed cladding 300mm (P 1024) & 167mm (P 1036) is not a structural product.
- Installing the cladding in temperatures below 0°C or above 30°C is not recommended.
- Do not install the cladding near a heat source.
- The protective tape should be removed immediately after installation.

Maintenance


- Cleaning PVC profiles is extremely easy; simply use a soft damp sponge and household cleaning detergent. Avoid the use of abrasive materials and ammonia or chlorine based cleaning agents such as bleach.
- Never use corrosive substances; solvents such as benzene, acetone, turpentine, kerosene or white spirit for example are not permitted.
- Never attempt to clean the profile without water or some form of moisture as this may scratch the surface of the PVC.
- Never paint the PVC profiles.









Recommended safety equipment and tools

Recommended safety equipment



Tools

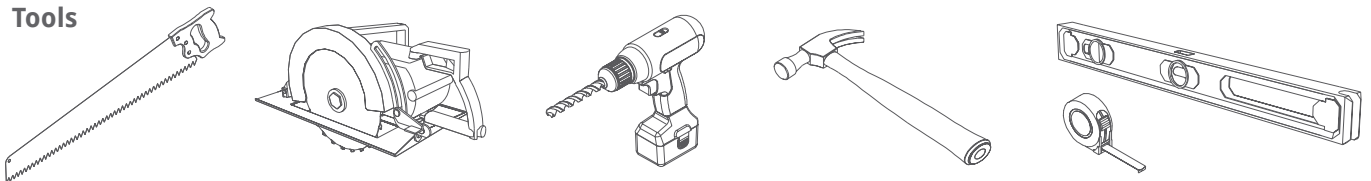


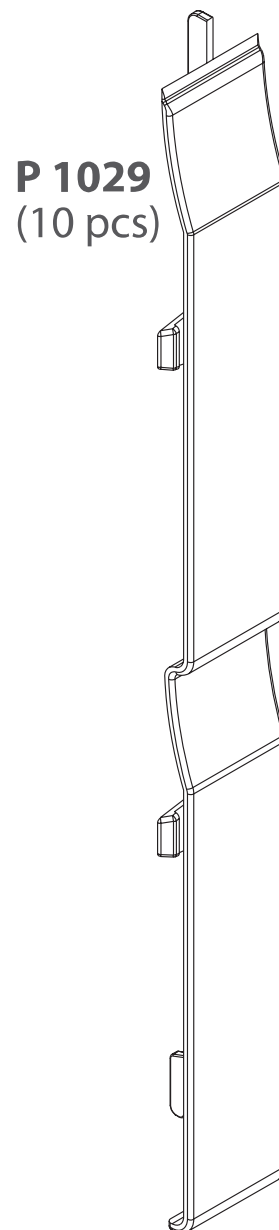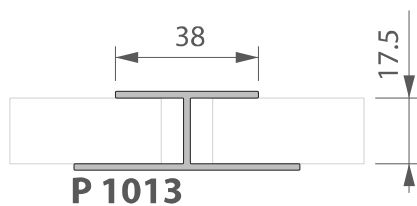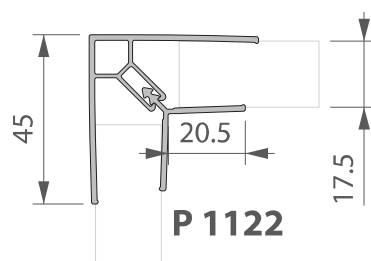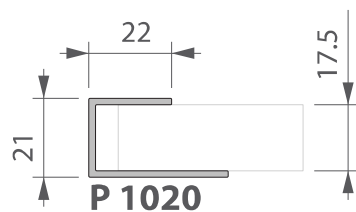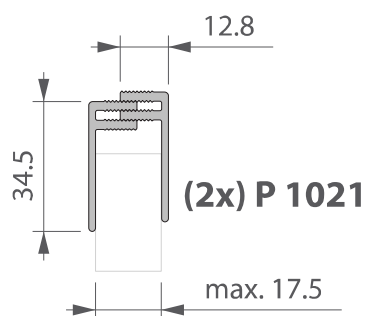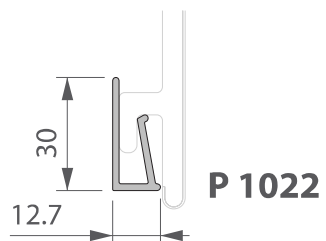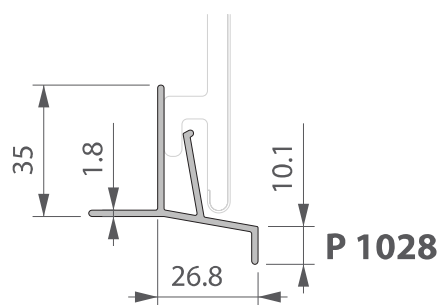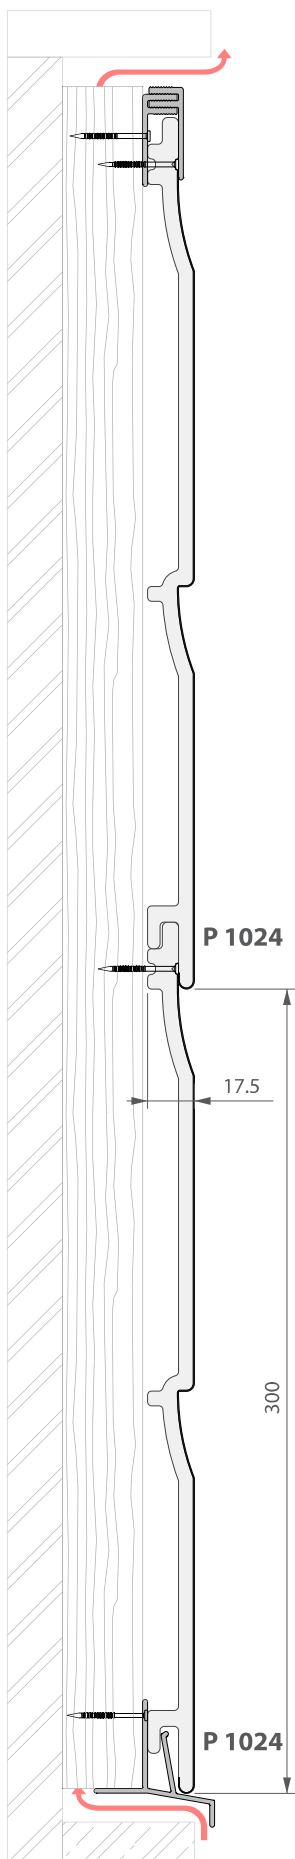


Double Shiplap Cladding Installation guide

Supports

Heart-to-heart distance = FIXATION P 1024 planks






	#m ²	kg/m ²
P 1024	3.33	4.63
P 1029	± 1.11	
P 1096	± 6 (white)	
Ø 3.5 x 30	± 12 (colours)	

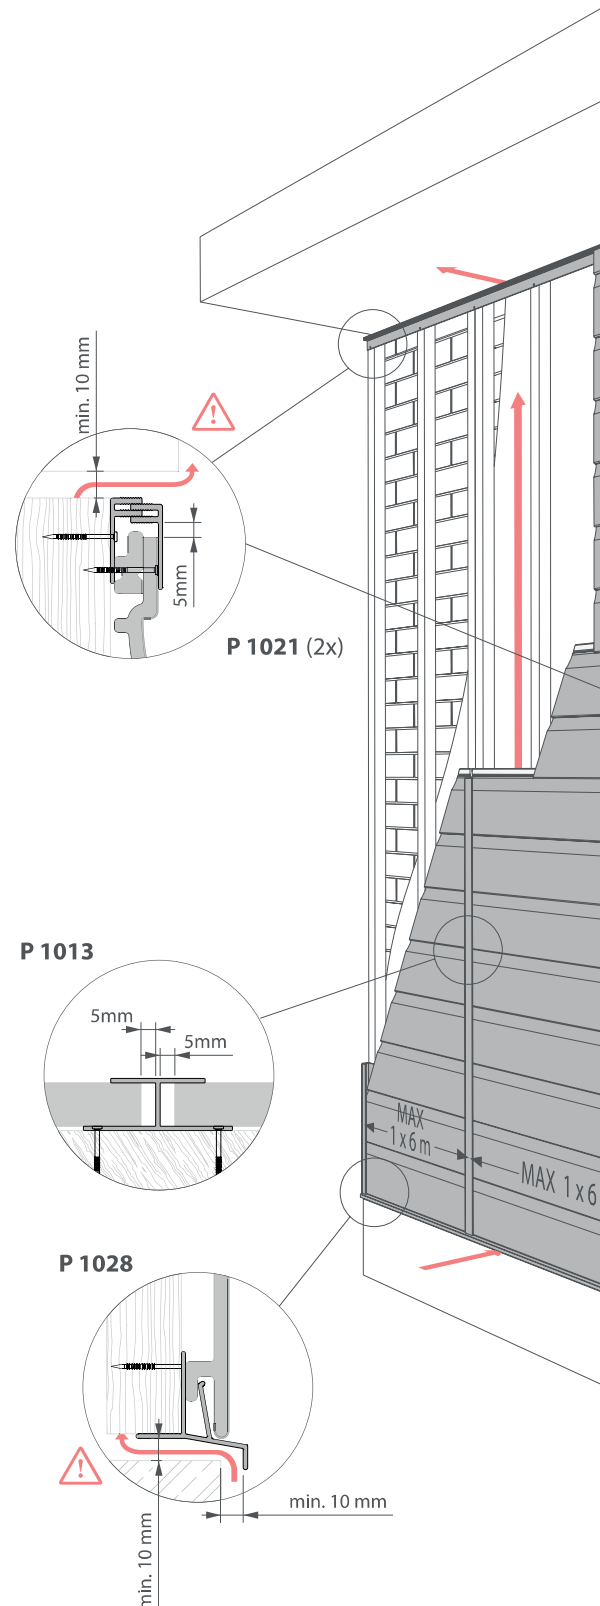


If installing colour
white (003)


If installing colour
other colours

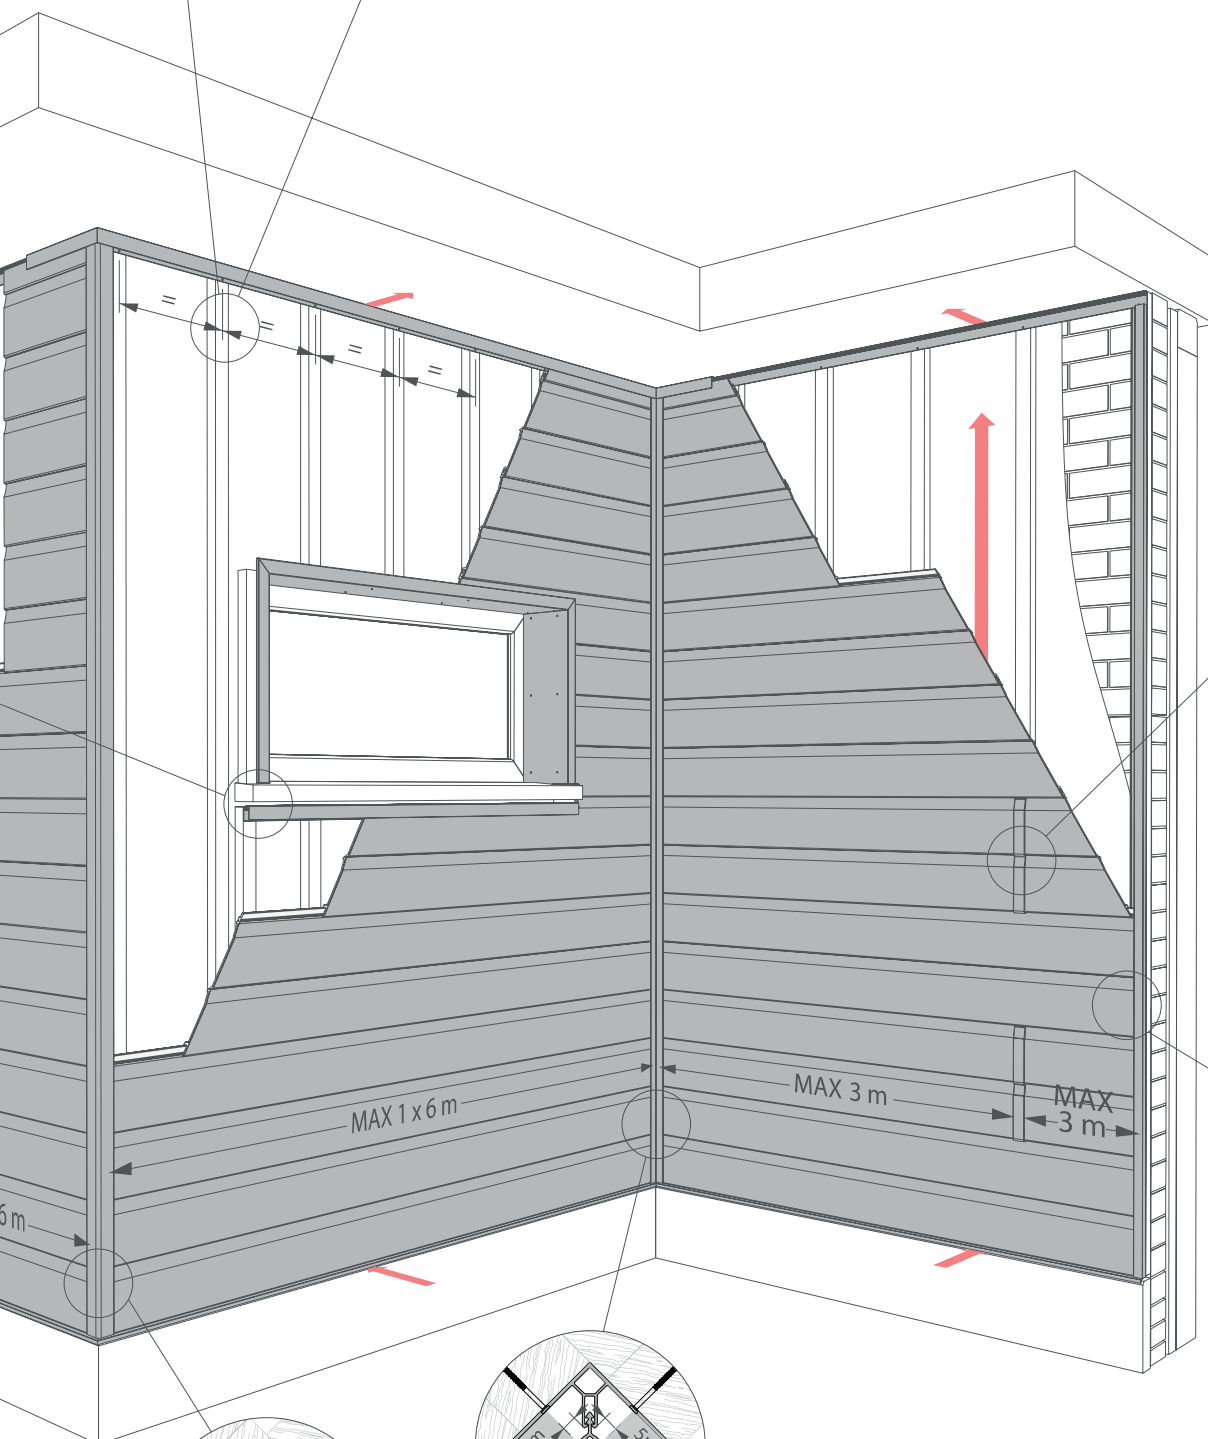


10mm P 1029




P 1020





P 1122



P 1122



Embossed Feather Edge Cladding Installation guide

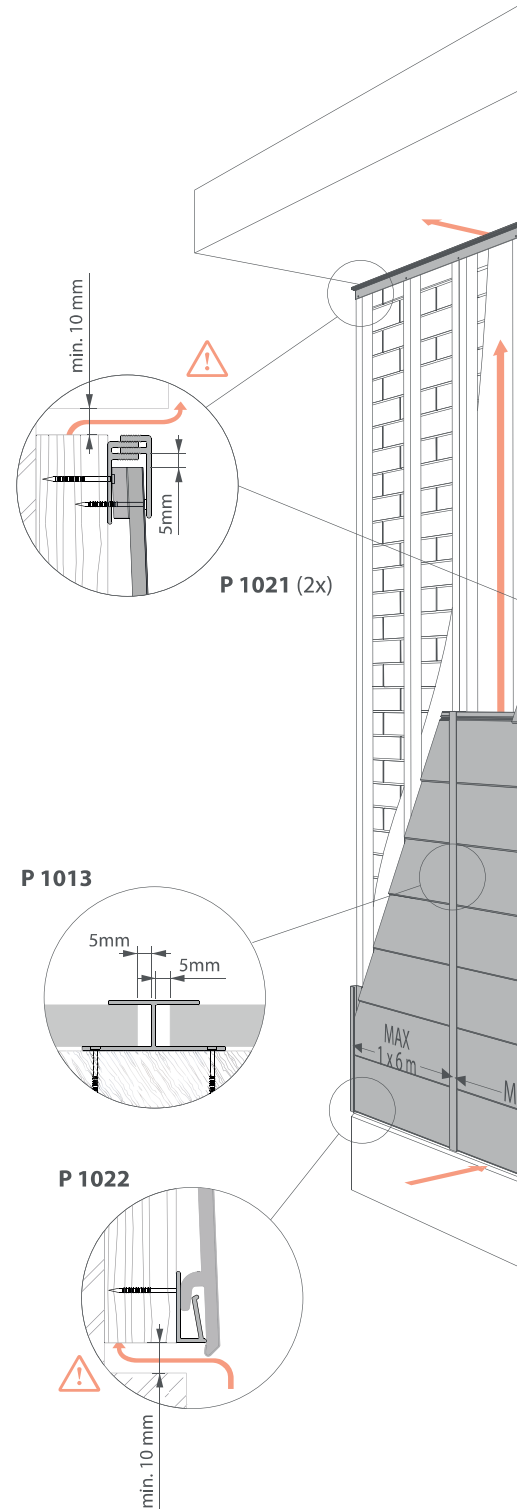
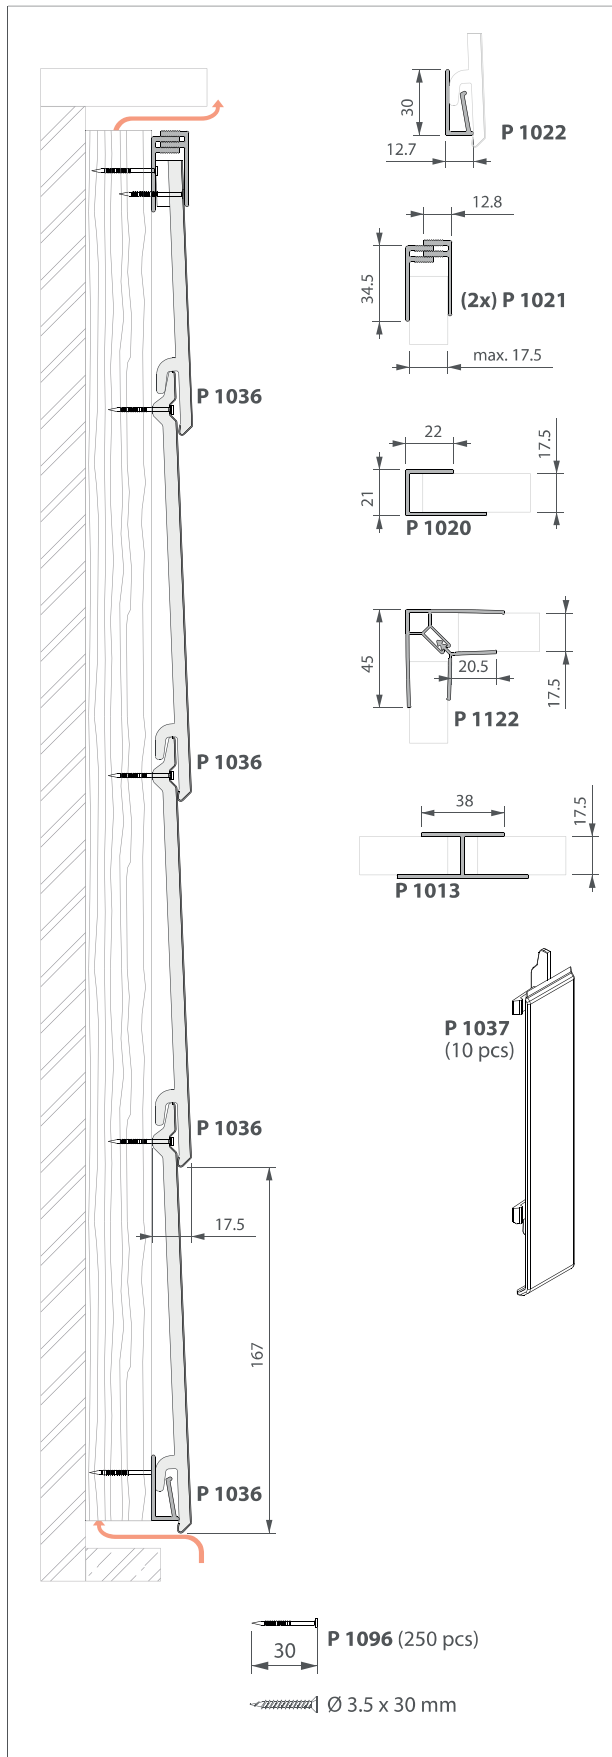


Colour white (003)


Other mass colours

SUPPORTS



heart-to-heart distance = FIXATION P 1036 planks

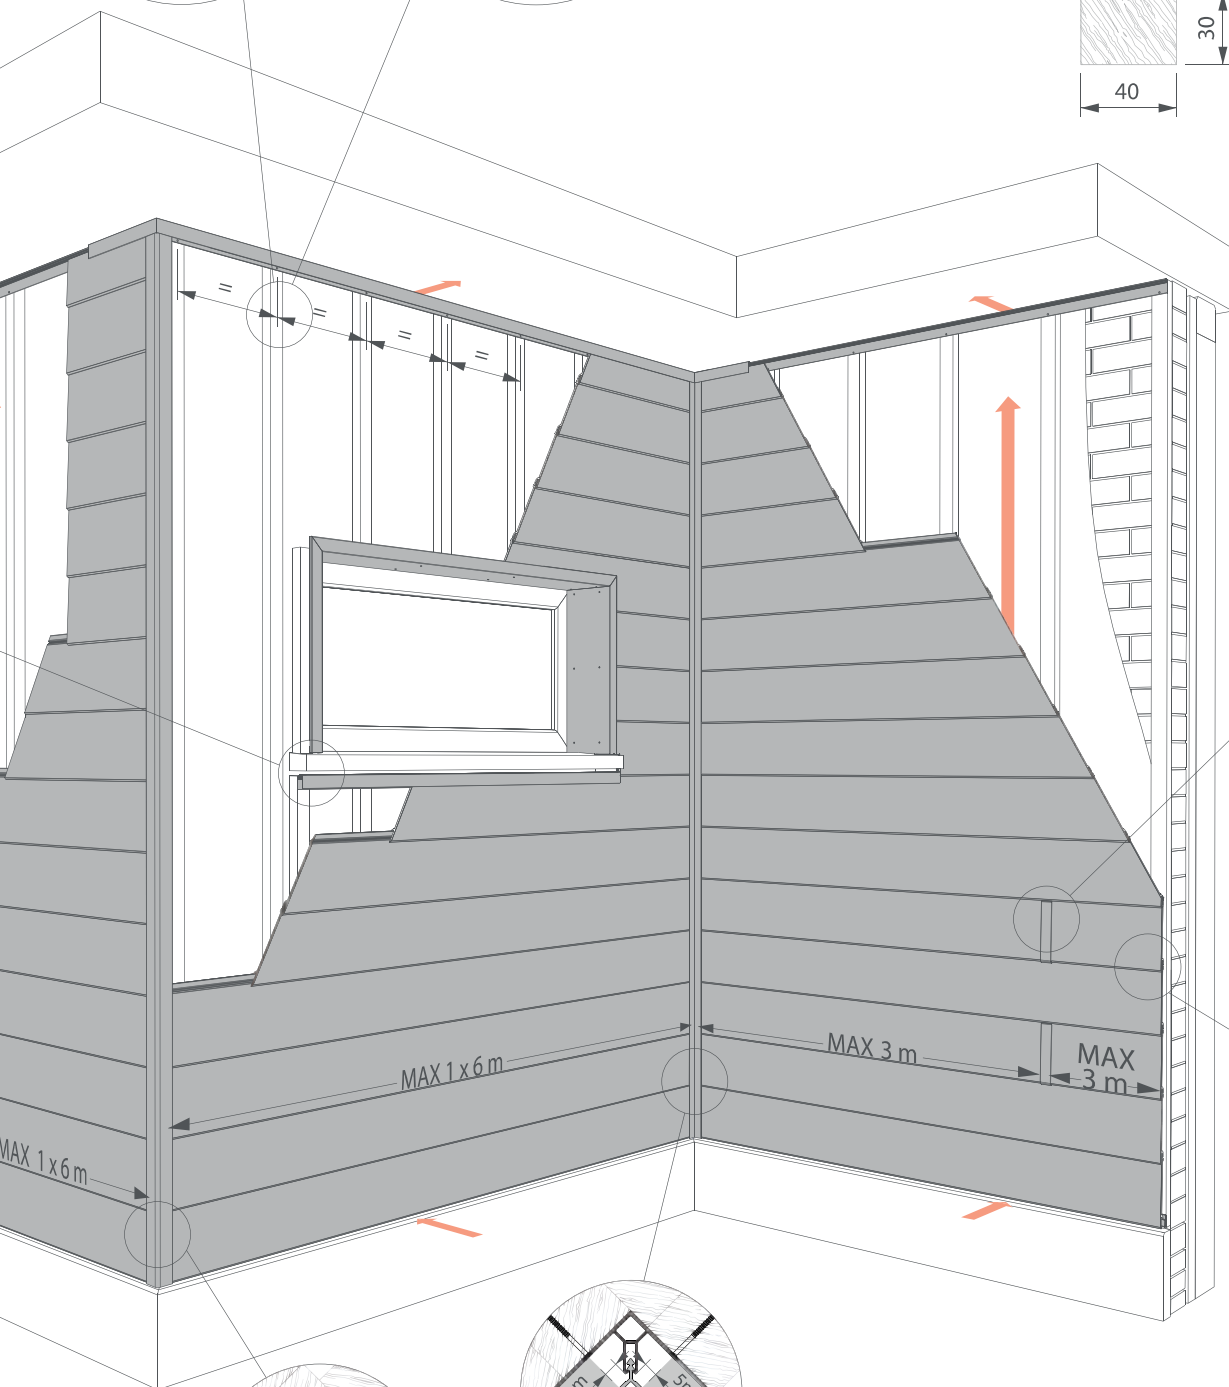


10mm P 1037



P 1020



P 1122



P 1122

	# m ²	kg/m ²
P 1036	6	4.55
P 1037	± 2	
P 1096	± 10 (white)	
Ø 3.5 x 30	± 20 (colours)	


**We also
offer...**



Deeplas roofline



Twinson decking



EasyCeil ceiling solution



Composite fencing



Deeplas window boards



Twinson cladding



**Decor internal wall and
ceiling system**

100% Lead Free
Calcium Organic

For further information on the range please call 0800 988 7307
Deeplas, Birchwood Way, Cotes Park Industrial Estate, Alfreton, Derbyshire DE55 4QQ

Document contains proprietary and confidential information, do not copy or disclose this information without the express written consent of Deeplas. Deeplas reserves the right to change this drawing and any associated documents.