

equinox[®]

QUOTE REQUEST FORM

ISSUE 5

NOW INCLUDES
envirotile[®]

2022



QUOTE/ORDER PROCEDURE

To request a quote for an Equinox tiled roof, fill out the quote request form and email to equinox@deeplas.co.uk

We endeavour to return your quote within 1 hour* (excluding weekends and bank holidays).

Please allow longer for complex orders or portals.

If any alterations are required, please email back the quote we have provided highlighting the changes.

DO NOT sign this. A new confirmation will be prepared for you to re-check and sign.

When you are happy that everything on the confirmation is exactly as required, sign it and email back to equinox@deeplas.co.uk

The signed confirmation constitutes your final approved order and the production paperwork is produced from this.

Any alterations made after you have returned the signed confirmation may be subject to charges.

Equinox roof kits will be delivered direct to you in 5 working days from date of order. If you have requested a specific delivery date, every effort will be made to accommodate your needs and we will contact you in writing to confirm of any issues.



01773 842336



equinox@deeplas.co.uk

* applies to quote requests received between 8:30am-17:00 Monday-Friday

If in any doubt at any stage, call the Conservatory Roof Department



REMEMBER

Make sure the property has been correctly surveyed, with accurate measurements provided. Once the Equinox roof has been made, no refunds can be given.

COLOUR OPTIONS

TILE OPTIONS

STEEL TILES



CHARCOAL



ANTIQUE
RED



BURNT
UMBER



MOSS
GREEN



EBONY



SLATE GREY

SLATESKIN GRP SHEET TILES

COMPOSITE SLATE TILES



BRICK
RED




PEWTER
GREY



STONE
BLACK



CHESTNUT



PLUM



RED
ROCK

NEW ENVIROTILE SLATE



TERRACOTTA



DARK
BROWN



SLATE
GREY



ANTHRACITE
GREY

FASCIA COLOURS



WHITE



CREAM



GOLDEN
OAK



IRISH
OAK




ROSEWOOD



ANTHRACITE




BLACK
ASH



CHARTWELL

GUTTERING COLOURS

OGEE-STYLE GUTTERING



WHITE




CLAY BROWN



BROWN



ANTHRACITE
GREY




BLACK

PILASTER COLOURS

HORIZONTAL CLADDING (COASTLINE)




ANTHRACITE
GREY



MOONDUST
GREY

VERTICAL CLADDING (ECOSCAPE)



SILVER BIRCH



SPICED OAK



MIDNIGHT
BLACK

Equinox Order Form



01773 842336 @ equinox@deeplas.co.uk

Is this <input type="checkbox"/> an order <input type="checkbox"/> a quote		Your information		Roof delivery address	
Quote reference no.		Company/Branch		Postcode	
		Customer ref.			
		Your name			
		Your telephone			
Date ordered	Date required	Your email			

Please illustrate an accurate roof survey below, including rafter spacings, all host wall positions and how the roof is situated against them. If bi-fold doors are being specified, clearly indicate the locations and respective widths so additional support can be advised on. **All dimensions to be internal frame.**

ROOF PLAN



FRAMEWORK DETAIL

An accurate frame thickness is needed to ensure the ring beam overhangs the framework correctly. Any full height brick piers or full height brick walls should be clearly noted, as a mixture of frame thicknesses can be catered for.

☐ 70mm
☐ 60mm
☐ Other

Please specify

Eaves type

☐ Standard Eaves Beam
☐ Soffit Eaves Beam

Please see reverse for details

Eaves height

Including dwarf wall (mm)

FASCIA & GUTTERING COLOUR

External fascia

☐ White
☐ Cream
☐ Golden Oak
☐ Irish Oak
☐ Rosewood
☐ Anthracite Grey
☐ Black Ash
☐ Chartwell Green

Internal fascia

☐ White
☐ Rosewood
☐ Golden Oak

Guttering colour

☐ White
☐ Clay Brown
☐ Brown
☐ Anthracite Grey
☐ Black

TILE COVERAGE

Steel tile

Lowest pitch = 15°

☐ Charcoal
☐ Antique Red
☐ Burnt Umber
☐ Moss Green
☐ Ebony

Composite slate

Lowest pitch = 15°

☐ Brick Red
☐ Pewter Grey
☐ Stone Black
☐ Chestnut
☐ Plum
☐ Red Rock

Envirotile Slate

Lowest pitch = 12.5°

☐ Terracotta
☐ Dark Brown
☐ Slate Grey
☐ Anthracite Grey

TILE COVERAGE

SlateSkin GRP sheet tile

Lowest pitch = 5°

All roofs may not be compatible with SlateSkin

☐ Slate Grey

VEGA GLASS PANEL

Vega glass panel

Quantity

Please indicate position on roof survey above.

Glass colour (1.0u)

☐ Blue
☐ Neutral
☐ Bronze
☐ Clear

LIGHTING

Internal lighting

Surface mounted internal downlights
110mm Diameter - 6W

☐ Warm White
☐ Cool White

Quantity

CENTRE PIVOT ROOF WINDOWS

Roof window size

☐ 550mm x 780mm
☐ 550mm x 980mm

Please mark on survey if locations are critical

Internal colour

All roof windows are RAL 7043 Traffic Grey external

☐ Pine (Standard)
☐ PVC (Premium)

Mechanism

☐ Manual
☐ Electric Switch + Rain Sensor

External lighting

Can only be fitted to a soffit eaves beam option

☐ Soffit downlights
☐ Optional Twilight sensor

Quantity will depend on roof size

FRAME SUPPORT MULLIONS

Top of dwarf wall to top of frame

Quantity Length (mm)

External height not to exceed (mm)
Take into account leadwork allowance

Restriction at mm

Actual roof height (all heights from top of frame)

Pitch (degrees)

Set external roof height to mm

Set internal roof height to mm

NEW

Please clearly indicate on drawing locations of pilasters

All corner and intermediate packs are supplied with all needed products (windows, corner posts, couplers, cladding, edging trims, battens + fixings)

Horizontal Cladding (Coastline)

☐ Anthracite Grey ☐ Moondust

Vertical Cladding (Ecoscape)

☐ Spiced Oak ☐ Silver Birch
☐ Midnight Black

Height (Cill not included in pack. All sizes from top of cill)

1470mm Quantity
 2070mm Quantity

CORNER & INLINE PILASTERS



The Deeplas Equinox tiled roof system has a partnership scheme with MFA Building Control Ltd (www.mfa.uk.com), an approved building control company that can handle the building control application on your behalf, and liaise with the local borough council. All solid roofs are likely subject to Building Control approval and is the installers responsibility to go through the correct channels to meet these requirements. Deeplas holds no responsibility if this advice is not followed. ** Approved building control companies aren't licenced to operate in Scotland. Equinox roofs installed within Scotland should be handled directly with the local borough council building control office and appropriate SER engineer. **


Price ex VAT

Signed


Print name

Date

Equinox Standard Eaves

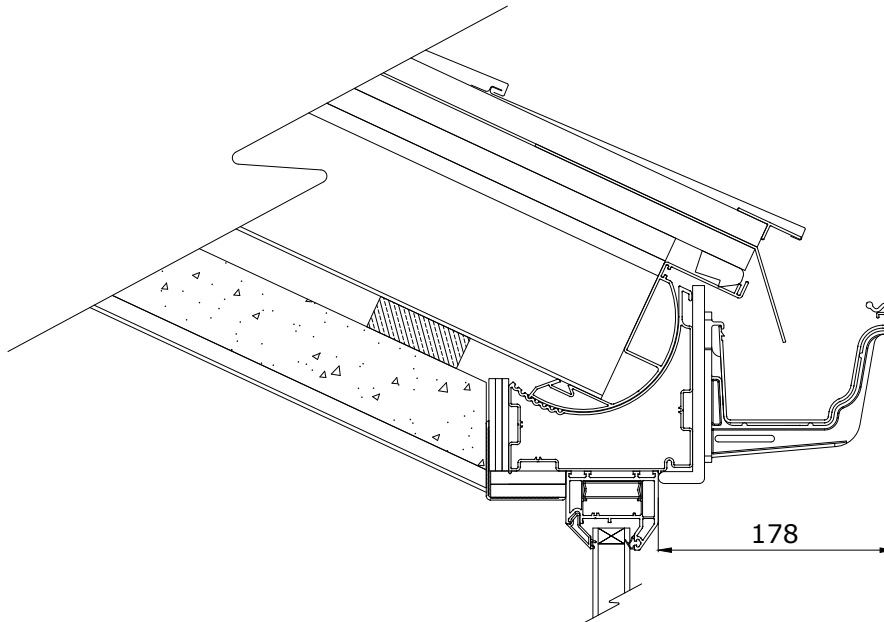

Equinox Soffit Eaves

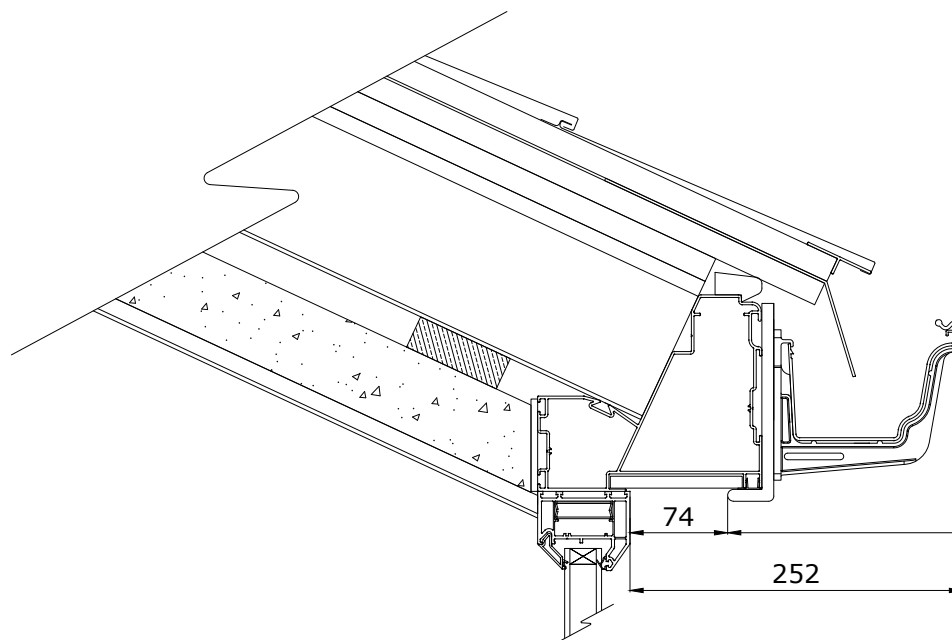

Available space to allow for an external grade downlight. Advised 60mm max diameter light.



The Deeplas Equinox tiled roof system has a partnership scheme with MFA Building Control Ltd (www.mfa.uk.com), an approved building control company that can handle the building control application on your behalf, and liaise with the local borough council. All solid roofs are likely subject to Building Control approval and is the installers responsibility to go through the correct channels to meet these requirements. Deeplas holds no responsibility if this advice is not followed. ** Approved building control companies aren't licenced to operate in Scotland. Equinox roofs installed within Scotland should be handled directly with the local borough council building control office and appropriate SER engineer. **