

equinox[®]

QUOTE REQUEST FORM

ISSUE 4

NOW INCLUDES
envirotile[®]

2021



QUOTE/ORDER PROCEDURE

To request a quote for an Equinox tiled roof, fill out the quote request form and email to equinox@deeplas.co.uk

We endeavour to return your quote within 1 hour* (excluding weekends and bank holidays).

Please allow longer for complex orders or portals.

If any alterations are required, please email back the quote we have provided highlighting the changes.

DO NOT sign this. A new confirmation will be prepared for you to re-check and sign.

When you are happy that everything on the confirmation is exactly as required, sign it and email back to equinox@deeplas.co.uk

The signed confirmation constitutes your final approved order and the production paperwork is produced from this.

Any alterations made after you have returned the signed confirmation may be subject to charges.

Equinox roof kits will be delivered direct to you in 5 working days from date of order. If you have requested a specific delivery date, every effort will be made to accommodate your needs and we will contact you in writing to confirm of any issues.



01773 842336



equinox@deeplas.co.uk

* applies to quote requests received between 8:30am-17:00 Monday-Friday

If in any doubt at any stage, call the Conservatory Roof Department

COLOUR OPTIONS

TILE OPTIONS

STEEL TILES



CHARCOAL




ANTIQUE
RED



BURNT
UMBER



MOSS
GREEN



EBONY

SLATESKIN GRP SHEET TILES



SLATE GREY

COMPOSITE SLATE TILES




BRICK
RED



PEWTER
GREY




STONE
BLACK



CHESTNUT



PLUM



RED
ROCK

NEW ENVIROTILE SLATE



TERRACOTTA



DARK
BROWN




SLATE
GREY



ANTHRACITE
GREY


FASCIA COLOURS



WHITE



CREAM




GOLDEN
OAK




IRISH
OAK



ROSEWOOD



ANTHRACITE



BLACK
ASH



CHARTWELL

GUTTERING COLOURS

OGEE-STYLE GUTTERING



WHITE




CLAY BROWN



BROWN



ANTHRACITE
GREY



BLACK

REMEMBER

Make sure the property has been correctly surveyed, with accurate measurements provided. Once the Equinox roof has been made, no refunds can be given.

Is this ☐ an order ☐ a quote

Quote reference no.

Date ordered

Date required

Your information

Company/Branch

Customer ref.

Your name

Your telephone

Your email

Roof delivery address

Postcode

ROOF PLAN

Please illustrate an accurate roof survey below, including rafter spacings, all host wall positions and how the roof is situated against them. If bi-fold doors are being specified, clearly indicate the locations and respective widths so additional support can be advised on. **All dimensions to be internal frame.**

!

FRAMEWORK DETAIL

An accurate frame thickness is needed to ensure the ring beam overhangs the framework correctly. Any full height brick piers or full height brick walls should be clearly noted, as a mixture of frame thicknesses can be catered for.

☐ 70mm

☐ 60mm

☐ Other

Please specify

Eaves type

☐ Standard Eaves Beam

☐ Soffit Eaves Beam

Please see reverse for details

Eaves height

Including dwarf wall (mm)

FASCIA & GUTTERING COLOUR

External fascia

☐ White

☐ Cream

☐ Golden Oak

☐ Irish Oak

☐ Rosewood

☐ Anthracite Grey

☐ Black Ash

☐ Chartwell Green

Internal fascia

☐ White

☐ Rosewood

☐ Golden Oak

Guttering colour

☐ White

☐ Clay Brown

☐ Brown

☐ Anthracite Grey

☐ Black

TILE COVERAGE

Steel tile

Lowest pitch = 15°

☐ Charcoal

☐ Antique Red

☐ Burnt Umber

☐ Moss Green

☐ Ebony

Composite slate

Lowest pitch = 15°

☐ Brick Red

☐ Pewter Grey

☐ Stone Black

☐ Chestnut

☐ Plum

☐ Red Rock

Envirotile Slate

Lowest pitch = 12.5°

☐ Terracotta

☐ Dark Brown

☐ Slate Grey

☐ Anthracite Grey

TILE COVERAGE

SlateSkin GRP sheet tile

Lowest pitch = 5°

All roofs may not be compatible with SlateSkin

☐ Slate Grey

VEGA GLASS PANEL

Vega glass panel

Quantity

Please indicate position on roof survey above.

Glass colour (1.0u)

☐ Blue

☐ Neutral

☐ Bronze

☐ Clear

LIGHTING

Internal lighting

Surface mounted internal downlights

110mm Diameter - 6W

☐ Warm White

☐ Cool White

Quantity

External lighting

Can only be fitted to a soffit eaves beam option

☐ Soffit downlighters

Quantity will depend on roof size

☐ Optional Twilight sensor

CENTRE PIVOT ROOF WINDOWS

Roof window size

☐ 550mm x 780mm

☐ 550mm x 980mm

Please mark on survey if locations are critical

Internal colour

All roof windows are RAL 7043 Traffic Grey external

☐ Pine (Standard)

☐ PVC (Premium)

Mechanism

☐ Manual

☐ Electric Switch + Rain Sensor

FRAME SUPPORT MULLIONS

Top of dwarf wall to top of frame

Quantity

Length (mm)

ROOF HEIGHT

Restrictions

External height not to exceed (mm)

Take into account leadwork allowance

Actual height

Height from top of frame

Pitch (degrees)

Set external roof height to (mm)

Set internal roof height to (mm)

!

The Deeplas Equinox tiled roof system has LABC, LABSS and JHAI certification, but is likely to be subject to Building Control approval. It is the installer's responsibility to go through the proper channels to meet requirements. Deeplas holds no responsibility if this advice is not followed.
(LABC achieved with SlateSkin GRP sheet tiles, composite slate tiles and steel tiles). (LABSS achieved with composite slate tiles and steel tiles, SlateSkin GRP sheet tiles pending).

DE00009 Is4/Apr21


Price ex VAT

Signed


Print name

Date

Equinox Standard Eaves

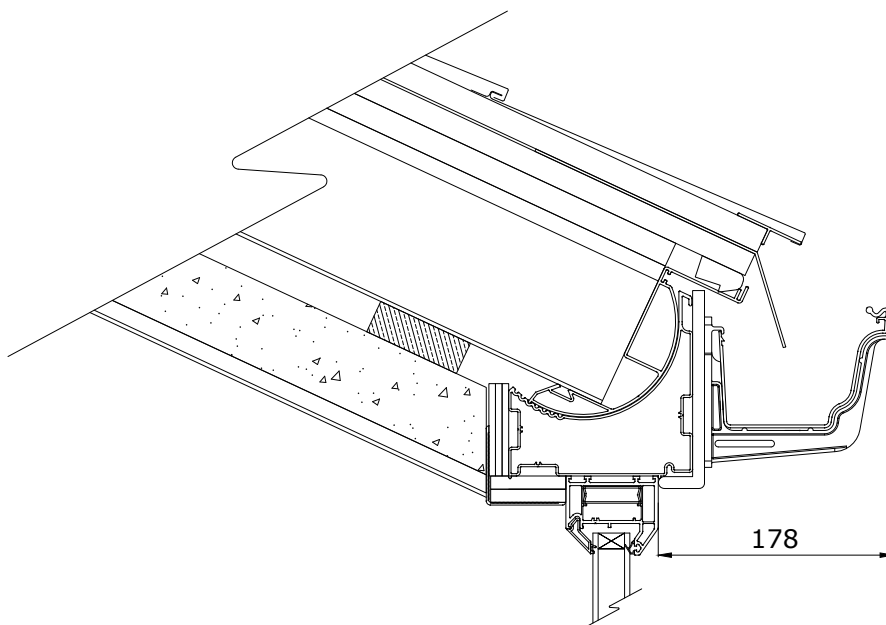

Equinox Soffit Eaves

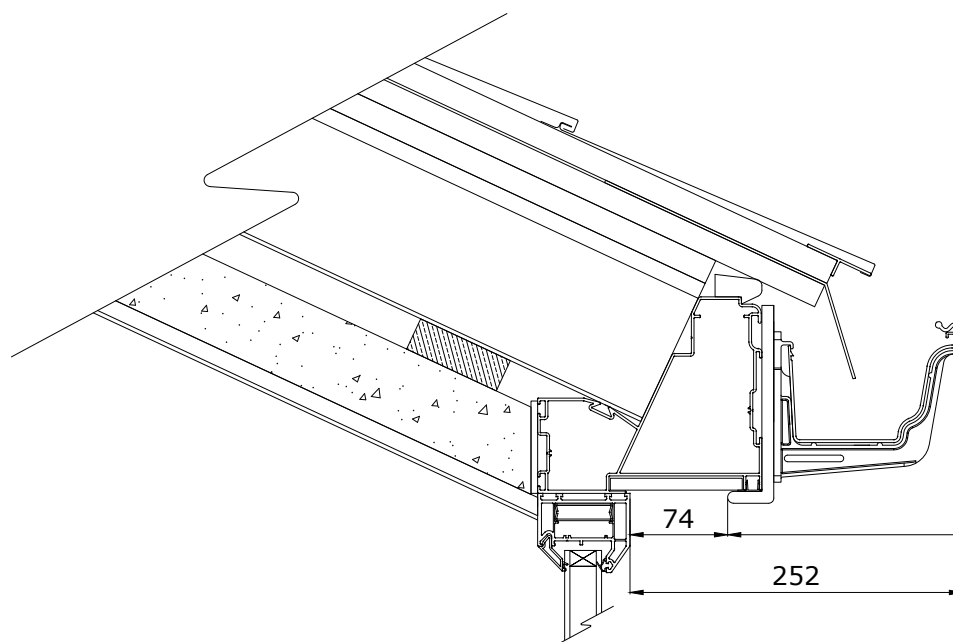

Available space to allow for an external grade downlight. Advised 60mm max diameter light.

