



BuzziShade 220-240V

Product Specification Sheet

This document contains technical information about the BuzziShade pendant and standing



www.buzzi.space

The BuzziShade combines lit surroundings with acoustic performance.

The design prevents eavesdroppers from hearing your private conversations, and reduces external noise levels to a minimum. The BuzziShade is extremely versatile. The perfect addition to any office, waiting room or restaurant and is ideal for large-scale events. Be creative in colour by adding a layer of fabric to the BuzziFelt shades. The BuzziShade is the culmination of an artistic collaboration between BuzziSpace and the four young Belgian furniture designers of Stal Collectief.

Designed by Stal Collectief

General



Pendant | Standing



BuzziFelt cover

Powder coated metal frame

Fabric power cord

Metal cable set



220 - 240V 50/60Hz Class 1

E27 fitting

Max. 60W



Dry usage



Assembled

Acoustics



Absorption


Content

Configurations	3
Technical components	4
Fabrics	6
Dimensions	8
Acoustics	11

Configurations


BuzziShade Pendant

- ◆ Medium | Large
 - BuzziFelt cover with lace
 - Metal frame in black, white, aluminium or fluorescent orange
- 🌲 Metal cable set in silver or black
 - Fabric power cord in black, red or fluorescent orange
- ✂ Height: 42 cm (Medium) or 62 cm (Large)
 - ✂ Diameter: Ø 40 cm - Ø 74 cm (Medium)
 - Ø 59 cm - Ø 112 cm (Large)
- ⚖ Medium: 4 kg
 - Large: 8 kg
- ... Lace: Black | White | Fluorescent orange
 - Optional extra layer Fabric | Terra | Hero inside or outside
 - Cable set: 200 cm | 500 cm, Silver | Black
- ⚠ If installing on suspended ceiling, verify load capacity prior to installation.

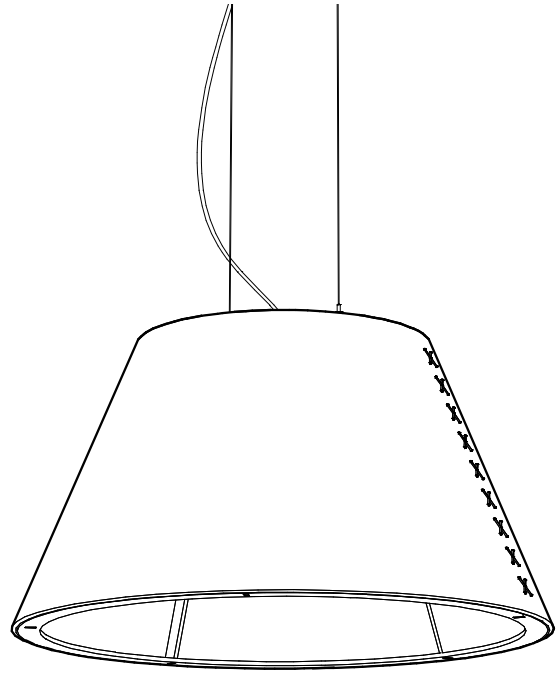

BuzziShade Standing

- ◆ BuzziFelt cover with lace
 - Metal frame in black, white or fluorescent orange
- 🌲 Fabric power cord in black, red or fluorescent orange
 - Black footswitch
- ✂ Height: 222 cm
 - ✂ Diameter: Ø 69 cm - 144 cm
- ⚖ 18 kg
- ... Lace: Black | White | Fluorescent orange

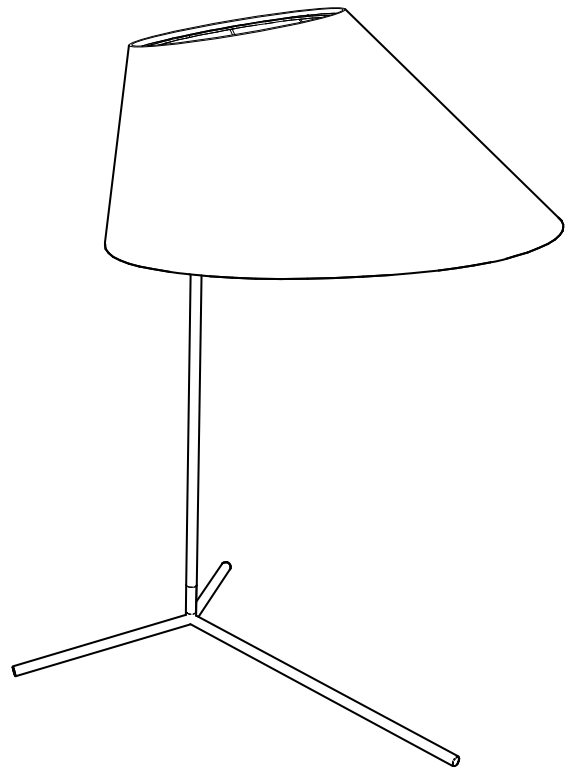

Technical components

BuzziShade Pendant

Ceiling Canopy

Powder coated metal canopy in Black (RAL 9005) or White (RAL 2010)

Including mounting bracket

Height: 2,6 cm

Diameter: 12 cm



Frame

Metal frame available in following colours:

Powder coated white | RAL 9010

Powder coated black | RAL 9005

Fluorescent orange | RAL 2005

Aluminium | not powder coated



Fitting | Power cord

E27 fitting

Fabric power cord

Colour frame	Colour fitting	Colour fabric power cord	Colour Ceiling Canopy
Black	Black	Black	Black
White	White	Red	White
Fluorescent orange	Black	Fluorescent orange	Black
Aluminium	Black	Black	Black



BuzziShade Standing

Frame

Metal frame available in following colours:

Powder coated white | RAL 9010

Powder coated black | RAL 9005

Fluorescent orange | RAL 2005



Fitting | Power cord

Black bakelite fitting E27 fitting

Fabric power cord

Colour frame	Colour fitting	Colour fabric power cord
Black	Black	Black
White	White	Red
Fluorescent orange	Black	Fluorescent orange


Power cord has a length of 250 cm finished with a plug and footswitch.

Power switch

Black footswitch

Fabrics


Felt



Composition 100% Recycled P.E.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5




Fabric



Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5




Terra



Category B
Composition 100% Pure New Wool
Weight 370 g/m² | 10.91 oz/yd²
Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek
Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN 1021.2/2006 | USA: CAL TB 117
Fastness to light EU 5 | USA 5
Fastness to rubbing EU: Wet 4 | Dry 4
Fastness to crocking USA: Wet 4 | Dry 4



Hero



Category C
Composition 96% new wool, 4% nylon
Weight 580 g/lin.m
Abrasion resistance 45.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)
Fastness to light Note 5-6, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 3-4, EN ISO 12945



kvadrat


Lace

Lace black | white | fluorescent orange




Dimensions


BuzziShade Pendant Medium

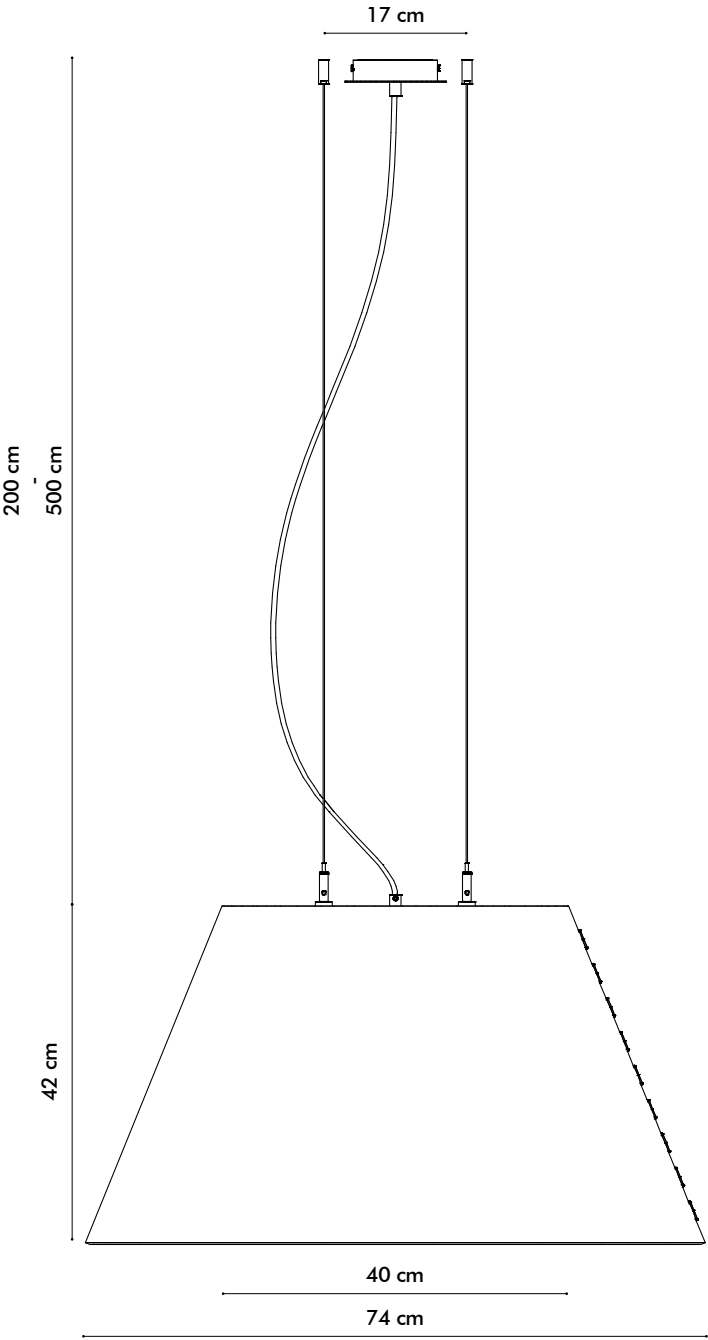

BuzziShade Pendant Large

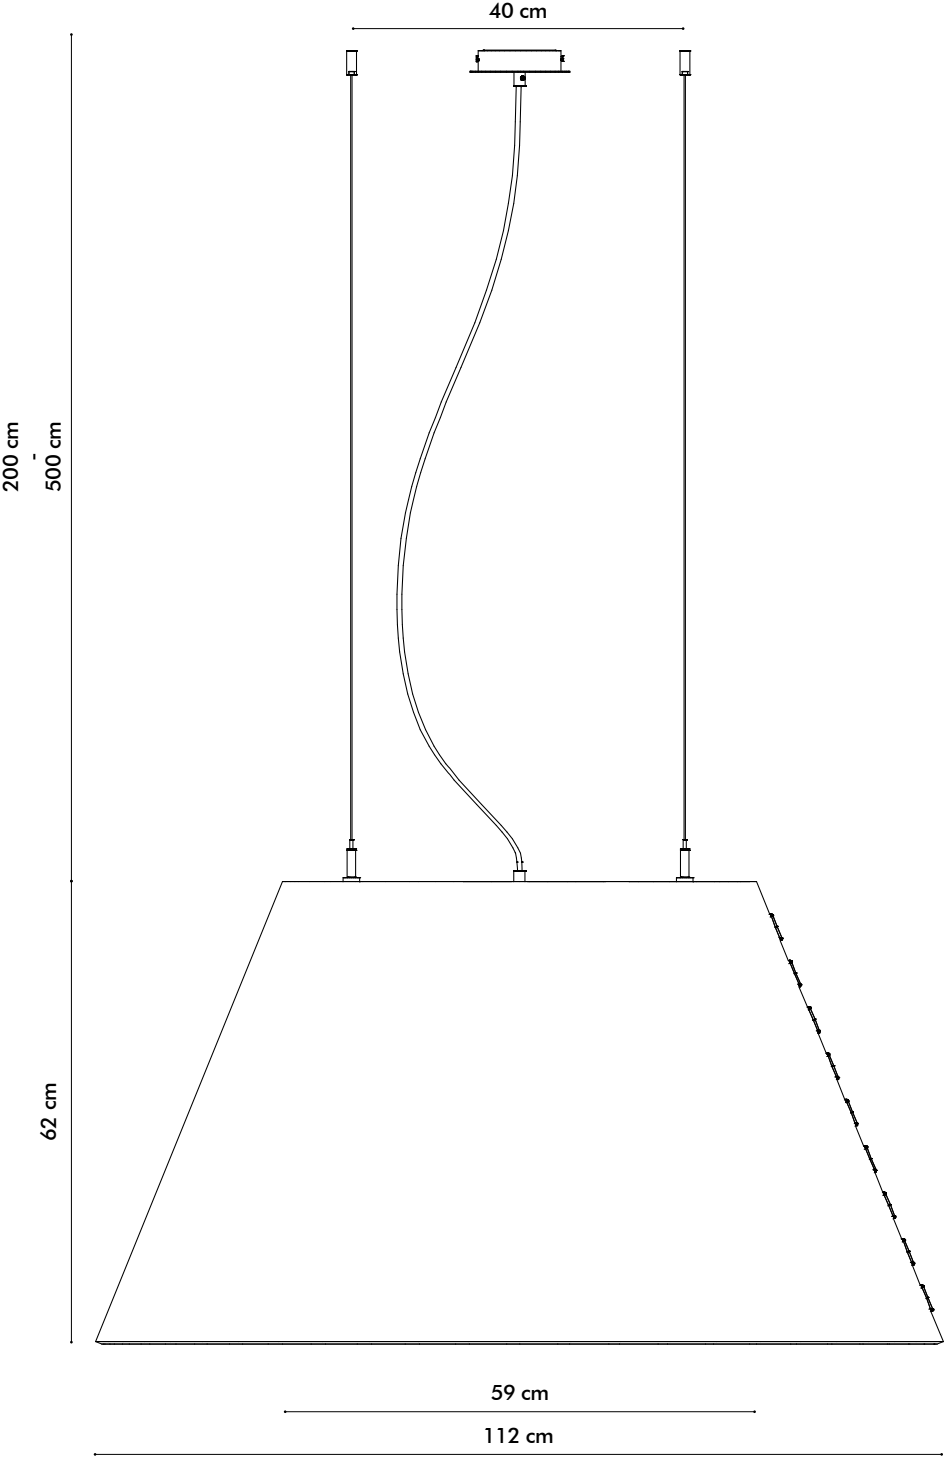


BuzziShade Standing

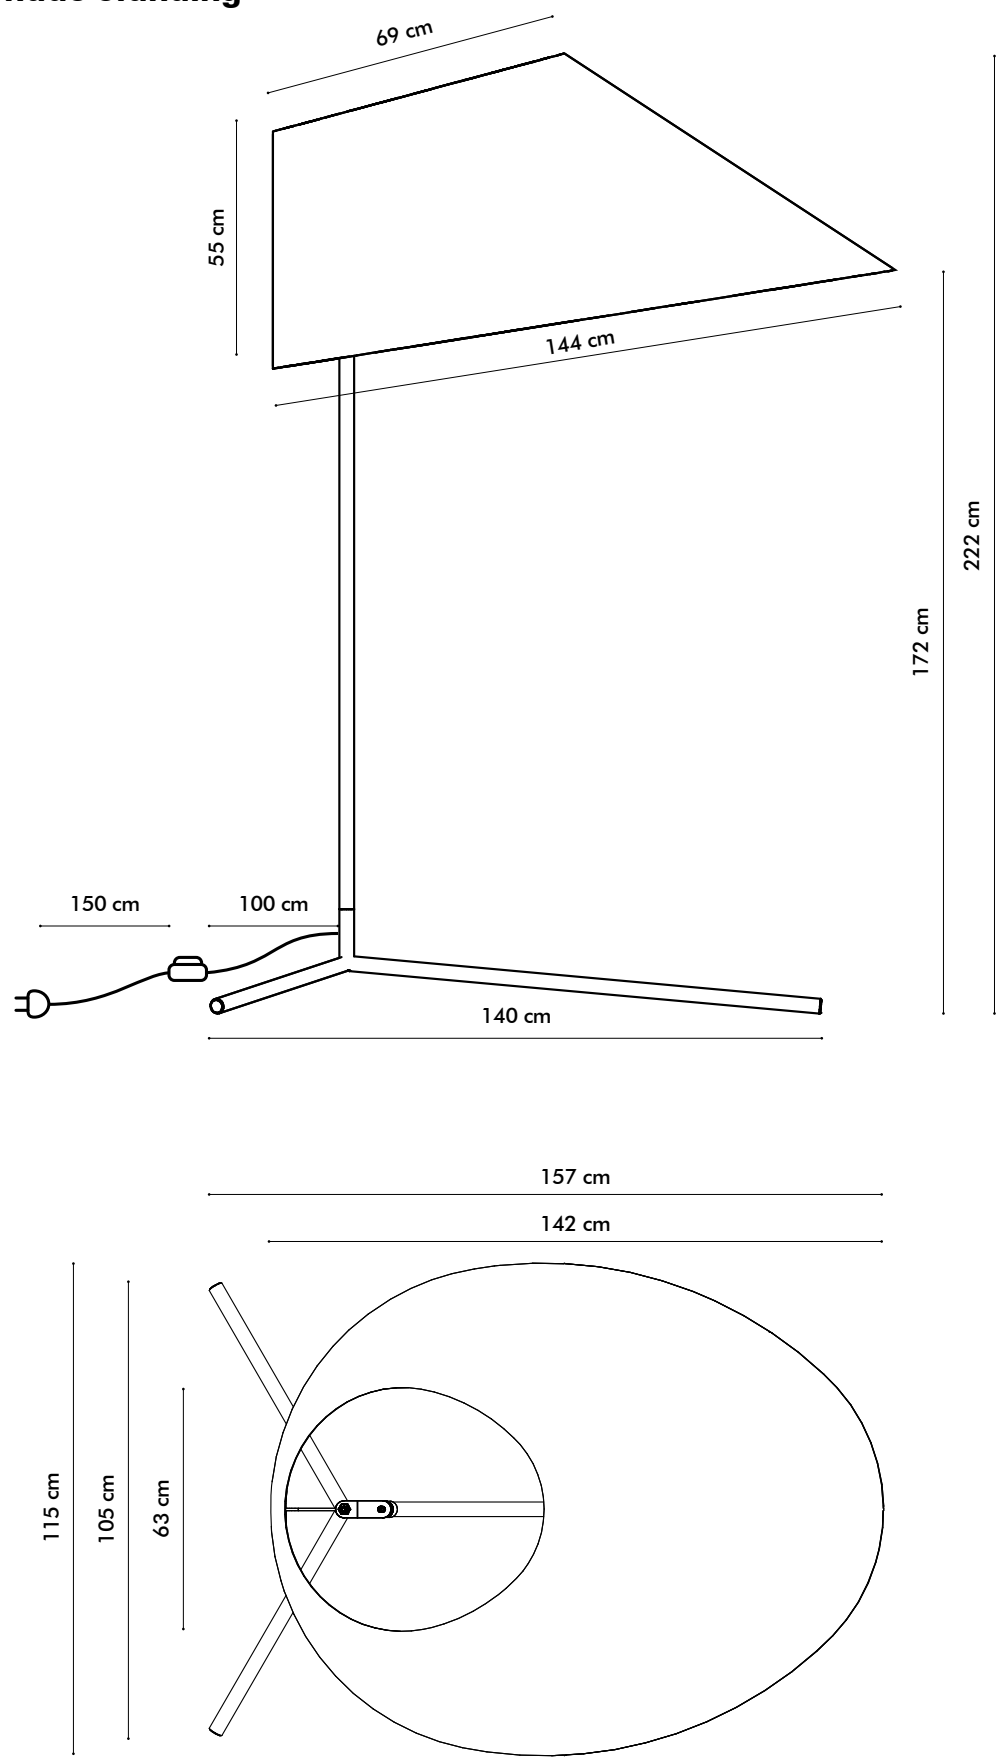

Acoustics

BuzziShade

Equivalent sound absorption area in m² per object

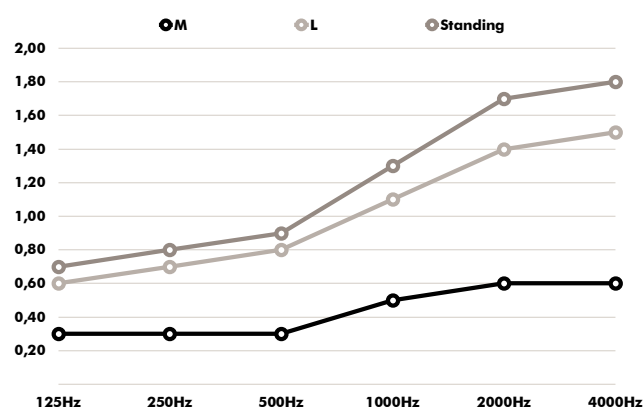

Hz	Shade M Aeq/m ²	Shade L Aeq/m ²	Shade Standing Aeq/m ²
125	0.3	0.6	0.7
250	0.3	0.7	0.8
500	0.3	0.8	0.9
1000	0.5	1.1	1.3
2000	0.6	1.4	1.7
4000	0.6	1.5	1.8