



BuzziPod

Product Specification Sheet

This document contains technical
information about the BuzziPod



www.buzzi.space

Sound absorbing panel

Large office spaces or residential lofts often echo, which can be distracting or impact productivity. BuzziSpace has developed the BuzziPod, a rectangular sound absorbing panel that can be fixed to the ceiling or walls to dampen sound waves while still offering a chic design.

Design by BuzziSpace Studio

General

-  BuzziPod
Pattern: Flat, 3D wide ribbed, 3D narrow ribbed
Fixing: Wall | Pendant
- Core: Honeycomb cardboard
Filling: CME35H foam
-  Cover: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Tonus Meadow, Memory 2, Matrix
Back: Antiskid (black with white BuzziSpace logo)
-  S: H 120 cm W 80 cm
H 47.24" W 31.50"
M: H 160 cm W 80 cm
H 62.99" W 31.50"
L: H 180 cm W 100 cm
H 70.87" W 39.37"
XL: H 200 cm W 120 cm
H 78.74" W 47.24"
-  S: 5,8 kg | 12.79 lbs
M: 7,5 kg | 16.53 lbs
L: 10 kg | 22.05 lbs
XL: 12,4 kg | 27.34 lbs
- ... Fixation: wall mounted | ceiling pendant: Fixing System Screw or Fixing System Magnet
Black or Alu cables 2 - 5 m | 78.74" - 196.85"
-  ⚠ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustics




Absorption

Content

Configurations	3	Fixing systems	9
Patterns	4	Dimensions	10
Fabrics	5	Acoustics	13

Configurations


BuzziPod

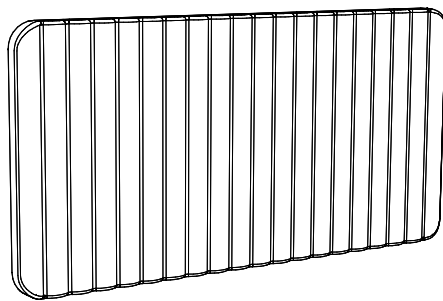


-  BuzziPod
Pattern: Flat, 3D wide ribbed, 3D narrow ribbed
Fixing: Wall | Pendant
- Core: Honeycomb cardboard
Filling: CME35H foam
-  Cover: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Tonus Meadow, Memory 2, Matrix
Back: Antiskid (black with white BuzziSpace logo)
-  S: H 120 cm W 80 cm
 H 47.24" W 31.50"
M: H 160 cm W 80 cm
 H 62.99" W 31.50"
L: H 180 cm W 100 cm
 H 70.87" W 39.37"
XL: H 200 cm W 120 cm
 H 78.74" W 47.24"
-  S: 5,8 kg | 12.79 lbs
M: 7,5 kg | 16.53 lbs
L: 10 kg | 22.05 lbs
XL: 12,4 kg | 27.34 lbs
-  Fixation: wall mounted | ceiling pendant: Fixing System Screw or Fixing System Magnet
Black or Alu cables 2 - 5 m | 78.74" - 196.85"
-  ⚠ If installing on suspended ceiling, verify load capacity prior to installation.

Patterns

Flat

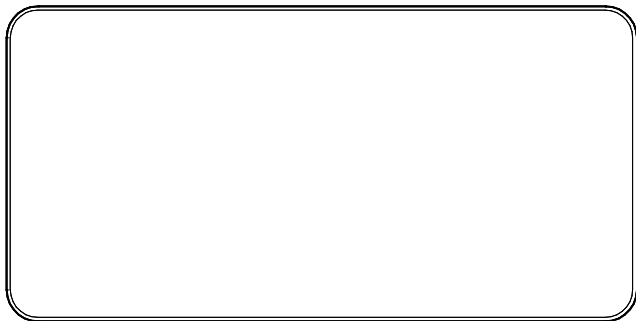


3D wide ribbed

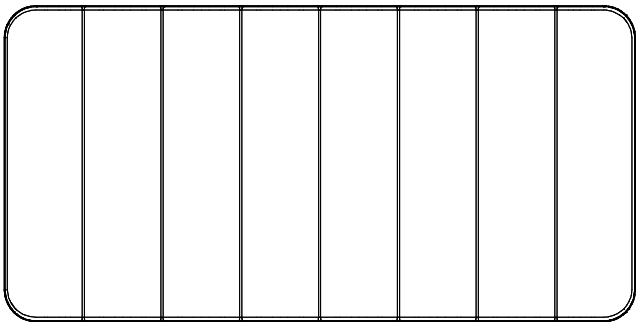

Rib every 20 cm | 7.87"

3D narrow ribbed

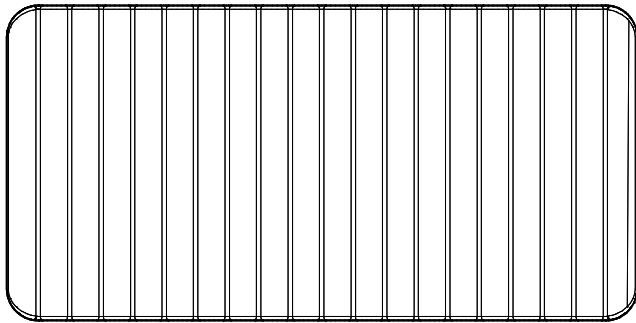

Rib every 8 cm | 3.15"

Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Revive 2

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 420 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5


Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4



Clara 2

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 2

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero

kvadrat



Category C

Composition 96% new wool, 4% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Tonus Meadow

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 3, EN ISO 12945



Memory 2

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945



Matrix

kvadrat



Category F

Composition 100% Trevira CS

Weight 760 g/lin.m

Abrasion resistance

App. 60.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 crib 5 | BS 5867 part 2 type B
DIN 4102 B1 | Önorm B1/Q1 | NF D 60 013
UNI 9175 1IM | US Cal. Tech. Bull. 117 | NFPA 701
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945





Antiskid (back only)





Fixing Systems

Fixing System Wall (optional)

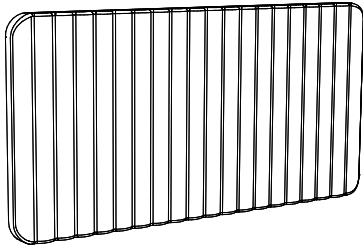

2 x 2 wooden brackets (excl. screws for ceiling)


Fixing System Ceiling Pendant (optional)

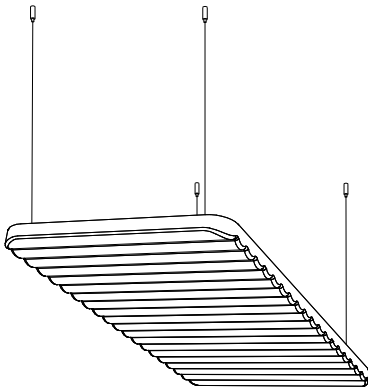


Fixing System Screw

4 cables per set, incl. fastner
(Stair bolts M6 not included)

200 or 500 cm
78.74 or 196.85"




Black or Silver



Fixing System Magnet

4 cables + 4 magnets*

200 or 500 cm
78.74 or 196.85"




Black or Silver


*1 magnet (Ø 3,2 cm H 0,8 cm | Ø 1.26" H 0.31") can take up to 10 kg | 22.05 lbs when hanging on a solid metal surface.

Dimensions

Pod

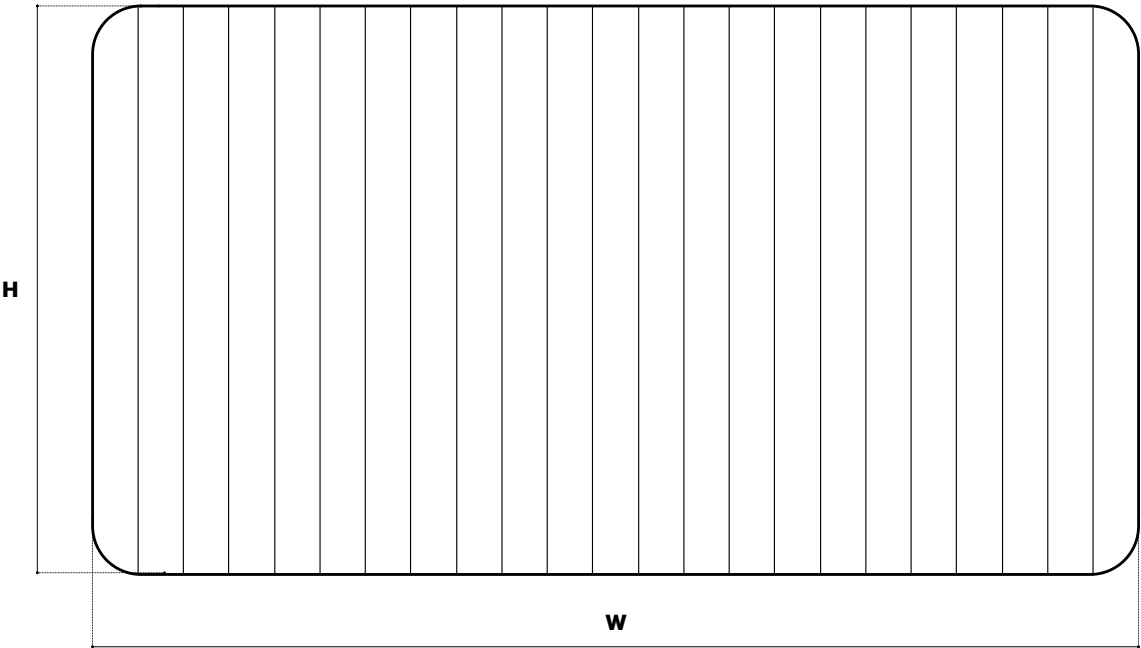

3D



3D wide ribbed



3D narrow ribbed



	S	M	L	XL
W	80 cm 31.50"	80 cm 31.50"	100 cm 39.37"	120 cm 47.24"
H	120 cm 47.24"	160 cm 62.99"	180 cm 70.87"	200 cm 78.74"



Dimensions Fixing System Wall

Horizontal use

Vertical use



S

W 120 cm H 80 cm
W 47.24" H 31.50"





M

W 160 cm H 80 cm
W 62.99" H 31.50"

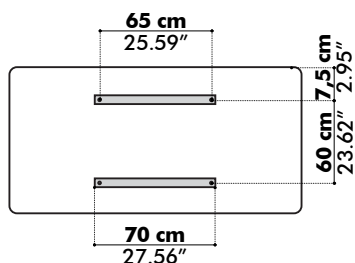



L

W 180 cm H 100 cm
W 70.87" H 39.37"

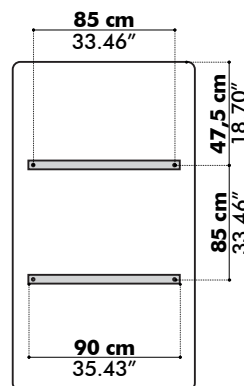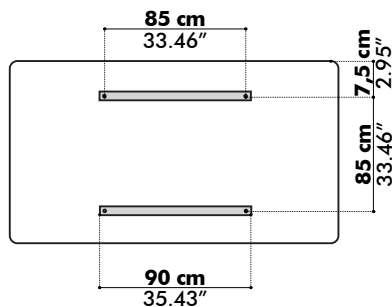

XL


W 200 cm H 120 cm
W 78.74" H 47.24"

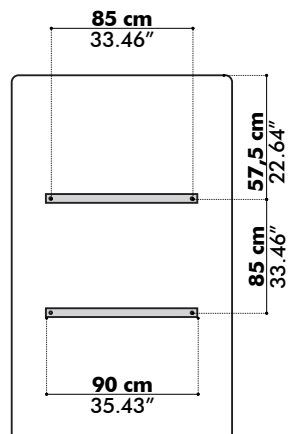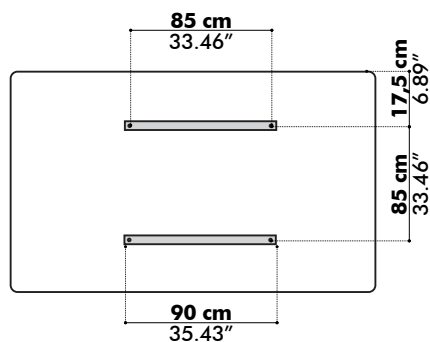

Dimensions Fixing System Ceiling


S

W 120 cm H 80 cm
W 47.24" H 31.50"




M

W 160 cm H 80 cm
W 62.99" H 31.50"

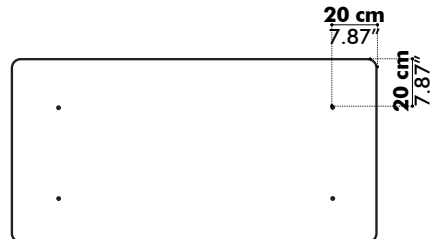


L

W 180 cm H 100 cm
W 70.87" H 39.37"

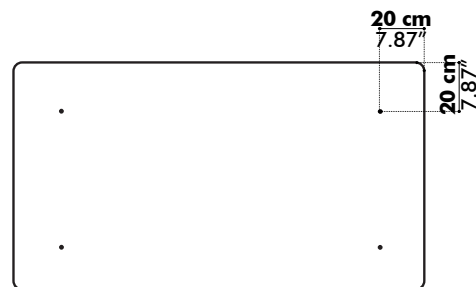

XL


W 200 cm H 120 cm
W 78.74" H 47.24"

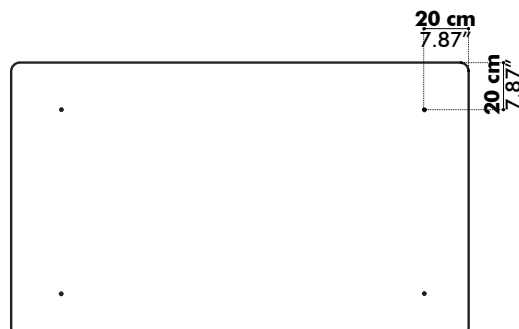

Acoustics

BuzziPod

Equivalent sound absorption area in m² per object

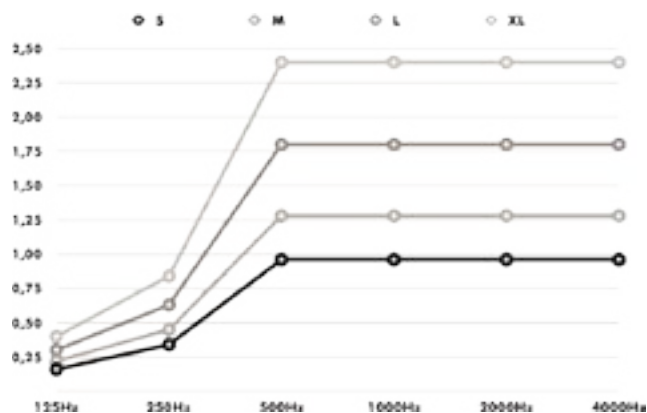

Hz	S Aeq/m²	M Aeq/m²	L Aeq/m²	XL Aeq/m²
125	0.16	0.22	0.30	0.40
250	0.34	0.45	0.63	0.84
500	0.96	1.28	1.80	2.40
1000	0.96	1.28	1.80	2.40
2000	0.96	1.28	1.80	2.40
4000	0.96	1.28	1.80	2.40