

Patty Gray: Combing with Oceanside Compatible™



Middle: Patty Gray demonstrates her combing process.

Far Left: Close up of stirring; note that the piece has been dammed using a stainless steel ring lined with ceramic fiber + Papyrus.

Above: One of Patty's classic finished combed pieces, rimmed in black.

Equipment/Supplies

- Kiln
- Kiln washed shelf
- 1/8" Ceramic fiber
- Papyrus® Kiln Shelf Paper
- Cleaned glass strips
- Green, welder's safety glasses
- Zetex gloves (up to 1093°C) for larger kilns; welding gloves for small kilns
- Cotton clothing
- 2 combing rods (3/16" stainless steel rods with wooden handles)
- Heat/flame resistant jacket (for larger kilns)
- Face shield for (larger kilns)
- Container of water to cool combing rods after each pull while combing



Combing is an exciting process of manipulating hot glass in a kiln. Make sure you have all the proper equipment, clothing, glass, etc., before you begin.

Note that the temperatures given here work well for Oceanside Compatible™ glass.

When I work in larger kilns that can accommodate standard 20" kiln shelves, I normally use 18" long x 1/4" wide glass placed on-edge atop a base of 18" x 18" clear glass. For the small 8" kilns, I use a 7" square shelf and make the strips 3/8" or 1/2" by 5 1/2" *without* a clear base. For these smaller combings I use 1/8" thick ceramic fiber strips, wrapped around the glass three times (strips are 3/8" wide lined with 3/8" strips of Papyrus that are secured with Elmer's Glue®). I use stainless steel Bridal Lace sewing pins to secure the fiber around the glass to create a dam. (See images on following pages that show this damming technique.) Stainless steel square or round rings lined with 1/8" ceramic fiber + Papyrus (secured with Elmer's Glue) work well also for damming a combed piece.

Schedule A — Large Kiln


(For firing 18"x 18" glass base with 18" long x ¼" wide strips on-edge)

Step	Rate per hour (F)	Temp (F)	Time (Min)
1	138°	537°	30 min.
2	138°	662°	60 min.
3	333°	*908°	10 min.
*Begin combing at 1660°. Turn kiln off – manipulate glass. When satisfied with combing, turn kiln back on until it reaches 1660° F to smooth out surface of glass, then proceed to step 4.			
4	AFAP	510°	3 hours
5	55°	426°	10 min.
6	44°	371°	1 min.


Schedule B

(For firing ¾ – 1½-inch strips on-edge without base glass)

Step	Rate per hour (F)	Temp (F)	Time
1	AFAP	*907°	10 min.
*Begin combing at 1660°. Turn kiln off and manipulate glass. When satisfied with combing, turn kiln back on until it reaches 1660° F to smooth out surface of glass, then proceed to step 2.			
2	AFAP	510°	2½ hours
3	55	426°	10 min.

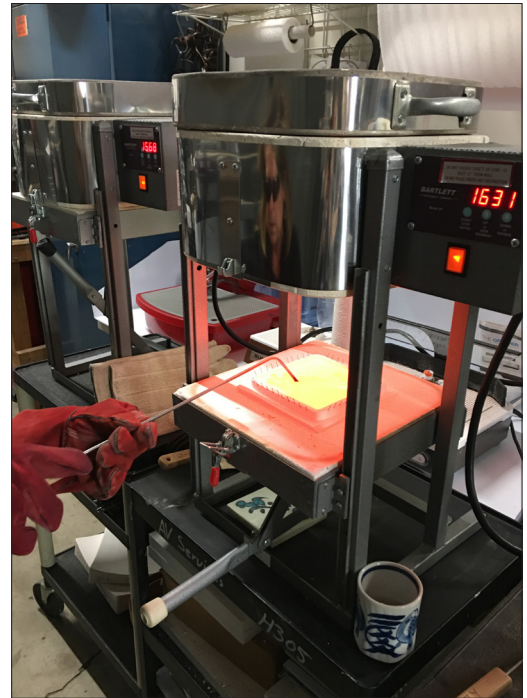

Photos: Above photo shows Patty stirring hot glass. Below, shows a progression of a combing: cold, hot after stirring, then finished. Note that you can see Patty's ceramic fiber damming technique here.



I arrange glass strips on-edge so that I can get really tight lines, lots of color/pattern. For the larger combings, these vertical strips are supported with two strips stacked flat on each end (this really is helpful when transporting the kiln shelf to the kiln). Alternatively, I will dam the large set-ups using kiln shelf strips (⅛" fiber + Papyros between the kiln shelf strip and the glass.) Damming is critical to ensure that the finished combing will be ¾" thick with an even perimeter. If the glass is not dammed, it will spread and become ¼" thick with irregular edges.

Since kiln wash breaks down at high temperatures, I use ⅛" ceramic fiber, with Papyros on top, between the glass and kiln shelf. If you want to do the combing directly onto kiln washed shelves I recommend using irid glass as a base (irid side down touching the kiln washed shelf) which will release from the kiln wash.

If not using a base glass, place the strips on-edge directly on the ⅛" ceramic fiber topped with Papyros, and dam the perimeter. Without a base piece of glass, you can heat the glass quickly until it reaches 904° C.

Once the kiln reaches 904° C I begin combing. **I turn off the kiln just prior to opening the door of the kiln**, and begin the combing process. I use two combing rods which allows me to pull and push the glass strips simultaneously and I can also manipulate the glass more before the glass stiffens (gets too cold to comb). After each combing I shut the kiln, turn power back on and wait for the temperature to reach 904° C and repeat the combing of the glass until the desired pattern is achieved.

Glass sticks to hot combing rods. If the glass starts to stick, stop combing and cool the combing rods by dipping the tips of the rods in water. Make sure they are dry before starting the next combing.

When I am satisfied with the combing, I take the temperature back up to 1660° F to level out the glass (the valleys made from the combing fill in to become smooth). I do not hold the temperature at 904° C.


There are times I will flash vent the combed piece to 593° C to prevent further fusing or devitrification on certain glasses. Note that if you drop the temperature below 593° C, you run the risk of warping the glass sheet or possibly cracking the glass itself.

Resist the temptation to open the kiln too soon! The only times I have experienced breakage (thermal shock) wasn't because of the glass or annealing schedule – just impatience!

Have fun, be safe. Combing glass is very rewarding!!!!

Important Combing Safety Notes

- ***The kiln needs to be turned off when combing glass***, if not you may get an electrical shock from the rods and the elements.
- If there are elements in kiln door, don't stand too closely.
- Cotton (natural fiber) clothing is recommended, no synthetic materials
- Synthetic materials can melt quickly, burn into your skin, or catch fire!
- Green welder's glasses are recommended to protect from infrared rays
- An ordinary safety shield can be used to protect your face from the heat.

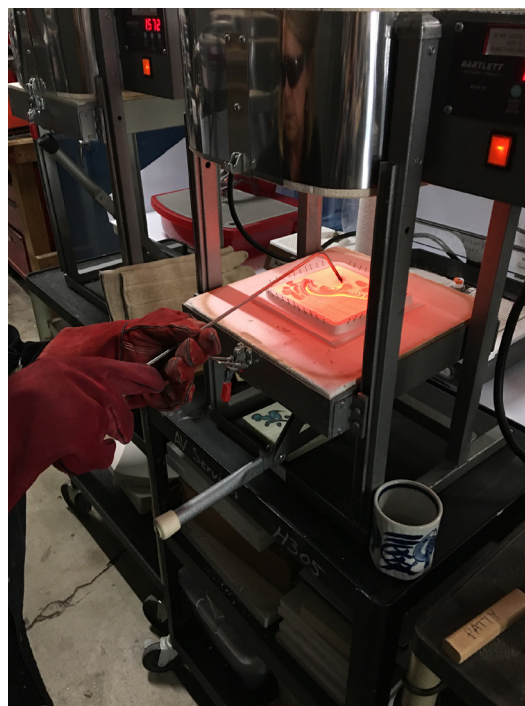

Above: Patty stirring a small combing piece.



Cold glass design ready to fire



Above: Finished combings by Patty Gray. The one on the left is showing reactivity between Oceanside Vanilla Cream and Silver Leaf in the center areas.



The same piece as above shown red-hot in the kiln immediately after combing. Note that you can see Patty's ceramic fiber damming technique in both these photos.